


JN6216B-S

AHD 1080P DVR

- AHD & IP Design
- Max. recording resolution: 1920 x 1080p
- 2 internal SATA HDD
- HDMI / VGA video outputs
- Video extraction through network or using USB flash drive
- Video management software with sureSIGHT
- Supporting sureLINK for dynamic IP Internet connection
- iView HD for remote monitoring on mobile phones



Unit: mm

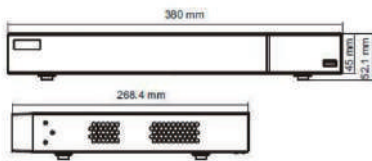

	Model	JN6216B-S	
VIDEO INPUT	ANALOG CAMERA	AHD (1080p), AHD (720p), PAL, NTSC	
	NO. OF CHANNEL	16	
VIDEO OUTPUT	IP CAMERA	TeleEye MP, MQ Series	
	NO. OF CHANNEL	8	
RECORDING	DIGITAL VIDEO	1 channel, 1920 x 1080	
	MAIN	VGA	1 channel, 1920 x 1080
		BNC	CVBS
COMMUNICATION	MODE	Manual, Schedule, Motion, Event-driven	
	HD TYPE	SATA X2 (Max. 6TB per HDD)	
	MAX. RECORDING RATE PER CHANNEL	1080p: 12 / 15fps 1080p lite: 25 / 30fps 720p: 25 / 30fps WD1: 25 / 30fps MP, MQ: 25 / 30fps	
AUDIO	PLAYBACK	Play, Forward, Backward, Pause, Digital zoom	
	NETWORK	RJ-45 10/100 base-T ethernet (auto sensing)	
EVENT HANDLING	CONCURRENT USER	6	
	WEB SERVER	Built-in	
RELAY SWITCH	TELEMETRY CONTROL	RS 485	
	USB	USB2.0 x 2	
POWER	INPUT	RCA x 4	
	OUTPUT	RCA x 1	
OPERATING	IP CAMERA AUDIO INPUT	8	
	EVENT TYPE	Video motion detection, External alarm, Video loss	
ENVIRONMENT	ACTION TYPE	Local recording, E-mail notification, Telemetry preset	
	EXTERNAL ALARM INPUT	4	
MECHANICAL DESIGN	NO. OF CHANNEL	1	
	VOLTAGE	12V DC	
	MAX. RATING	15W (without HDD)	
	AMBIENT TEMPERATURE	-10°C - 50°C	
	RELATIVE HUMIDITY	10% - 90%	
	DIMENSION	380mm (W) x 280mm (D) x 52mm (H)	
	WEIGHT (kg)	1.58	

Terms & Conditions 使用細則
Design and specifications are subject to change without prior notice. Copyright © 2018 Signal Communications Limited.
TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.