

JN6416-S


4MP AHD & IP Hybrid DVR

- 4MP AHD & IP Hybrid Design
- Max. recording resolution: 4MP (2560 x 1440)
- 2 internal SATA HDD
- HDMI (4K) / VGA video outputs
- Video extraction through network or using USB flash drive
- Video management software with sureSIGHT
- Supporting sureLINK for dynamic IP Internet connection
- iView HD for remote monitoring on mobile phones



Model JN6416-S

Unit: mm

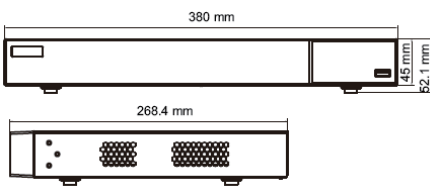

VIDEO INPUT	ANALOG CAMERA	4MP, 3MP, 1080P, 720P, WD1
	NO. OF CHANNEL	16
VIDEO OUTPUT	IP CAMERA	MP, MQ Series(4MP / 3MP / 1080P / 960P / 720P)
	NO. OF CHANNEL	4
AUDIO	Digital Video	1 channel, 3840 x 2160, 1920 x 1080, 1280 x 1024
	VGA	1 channel, 1920 x 1080, 1280 x 1024
	BNC	CVBS (used as spot output)
RECORDING	INPUT	RCA x 4
	OUTPUT	RCA x 1
	IP CAMERA AUDIO INPUT	4
COMMUNICATION	MODE	Manual, Schedule, Motion, Event-driven
	HD TYPE	SATA X 2 (Max. 8TB per HDD)
	MAX. RECORDING RATE PER CHANNEL	4MP / 3MP : 12 fps (PAL) / 15 fps (NTSC) 1080P / 720P / WD1 : 25 fps (PAL) / 30 fps (NTSC) MP, MQ: 25 / 30fps
EVENT HANDLING	PLAYBACK	Play, Forward, Backward, Pause, Digital zoom
	NETWORK	RJ45 10/100/1000Mbps x 1
	CONCURRENT USER	10
POWER	WEB SERVER	Built-in
	RS485	RS485 x1, connect to PTZ or keyboard
	USB	USB2.0 x 1 (front panel), USB3.0 x 1 (rear panel)
OPERATING ENVIRONMENT	EVENT TYPE	Video motion detection, External alarm, Video loss
	ACTION TYPE	Recording, Snap, Email, Preset
	ALARM INPUT	4
MECHANICAL DESIGN	ALARM OUTPUT	1
	VOLTAGE	12V DC
	MAX. RATING	18W (without HDD)
MECHANICAL DESIGN	AMBIENT TEMPERATURE	-10°C - 50°C
	RELATIVE HUMIDITY	10% - 90%
	DIMENSION	380mm (W) x 280mm (D) x 52mm (H)
	WEIGHT	1.58

Terms & Conditions 使用細則

Design and specifications are subject to change without prior notice. Copyright © 2018 Signal Communications Limited. TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.